

Multilin™ 850

Innovative Feeder Protection System for Industrial and Utility Feeder Applications

The Multilin 850 relay is a member of the Multilin 8 Series protective relay platform and has been designed for the management, protection and control of feeder applications. The Multilin 850 is used to provide primary (main) or backup protection for underground and overhead feeders for utility and industrial power networks.

Designed with advanced communications options and detailed asset monitoring capabilities, the Multilin 850 provides advanced functionality, including high-performance protection, extensive programmable logic and flexible configuration capabilities.

The advanced communications of the 8 Series platform allows an easy integration into SCADA or electrical control systems for smoother asset monitoring and control.

Key Benefits

- Comprehensive feeder protection
- Advanced breaker diagnostics with high-end fault and disturbance recording
- High-end cyber security such as AAA, Radius, RBAC, and Syslog helps enable NERC® CIP requirements
- Draw-out design simplifies testing, commissioning and maintenance, thereby increasing process uptime
- Wi-Fi connectivity minimizes system configuration and provides safe relay programming and diagnostic retrieval
- Relay environmental diagnostic information helps reduce system downtime

Applications

- Wide range of feeder applications for utility, oil & gas, mining & metals, process industry, commercial, and water wastewater
- Comprehensive protection and management of incoming and outgoing feeders
- Fast protection pass enables use for load shedding schemes
- Advanced communications and flexlogic for reliable automatic bus transfer schemes
- High speed fault detection for arc flash mitigation



Innovative Technology & Design

- Advanced feeder protection, control and diagnostics capability
- Patented environmental monitoring and diagnostics
- Advanced, flexible and embedded communications: IEC® 61850, IEC 62439/ PRP, Modbus® RTU & TCP/IP, DNP3.0, IEC 60870-5-104
- Single setup and configuration across the platform
- Elimination of electrolytic capacitors
- Field swappable power supply
- Enhanced relay draw-out construction

Exceptional Quality
& Reliability

- IPC A-610-E Class 3 manufacturing standards
- Highest reliability standards for electronics testing
- 100% Environmental Stress Screening and full functional testing
- Rated for IP54 (front) applications
- Standard Harsh Conformal Coating

Uncompromising Service & Support

- Covered under GE's 10 year warranty plan
- Designed, tested and manufactured by GE



Multilin 8 Series Platform Overview

From oil pumping and refining facilities, to open pit or underground mining and processing operations, to large or small utilities, customers demand solutions that ensure maximum process uptime, minimum operational and maintenance efforts, and have the durability to withstand harsh environmental conditions.

The Multilin 8 Series is GE's next-generation protection and control relay platform provides comprehensive protection and asset monitoring for critical feeders, motors, generators, and transformers.

Multilin 8 Series Platform - Application Example



850 Feeder Protection System

- Advanced protection with comprehensive voltage functions
- Extensively customizable logic for complex interlocking and load shedding
- 2 CB control and 4 shot auto reclose





889 Generator Protection System

- Advanced unit differential protection
- Generator monitoring and diagnostics
- 100% stator ground protection





850 Feeder Protection System

- Comprehensive voltage and current protection
- Advanced built-in main-tie-main schemes
- Redundant and reliable IEC 61850 communications



The Multilin 8 Series is designed to solve the challenges that customers face in running their day-to-day operations including maximizing system and process uptime, simplifying system integration and maintenance, and extending the life of critical assets. Utilizing advanced design practices (IPC A-610 standards), superior technology (elimination of all electrolytic capacitors), and state-of-the-art test and manufacturing facilities (every device endures 100% Environmental Stress Screening), GE is raising the bar on system performance and reliability.

With advanced communications the Multilin 8 Series integrates easily and seamlessly into new or existing DCS/SCADA system, along with other Multilin protection devices, providing a comprehensive solution for the end-to-end electrical system within the operations.

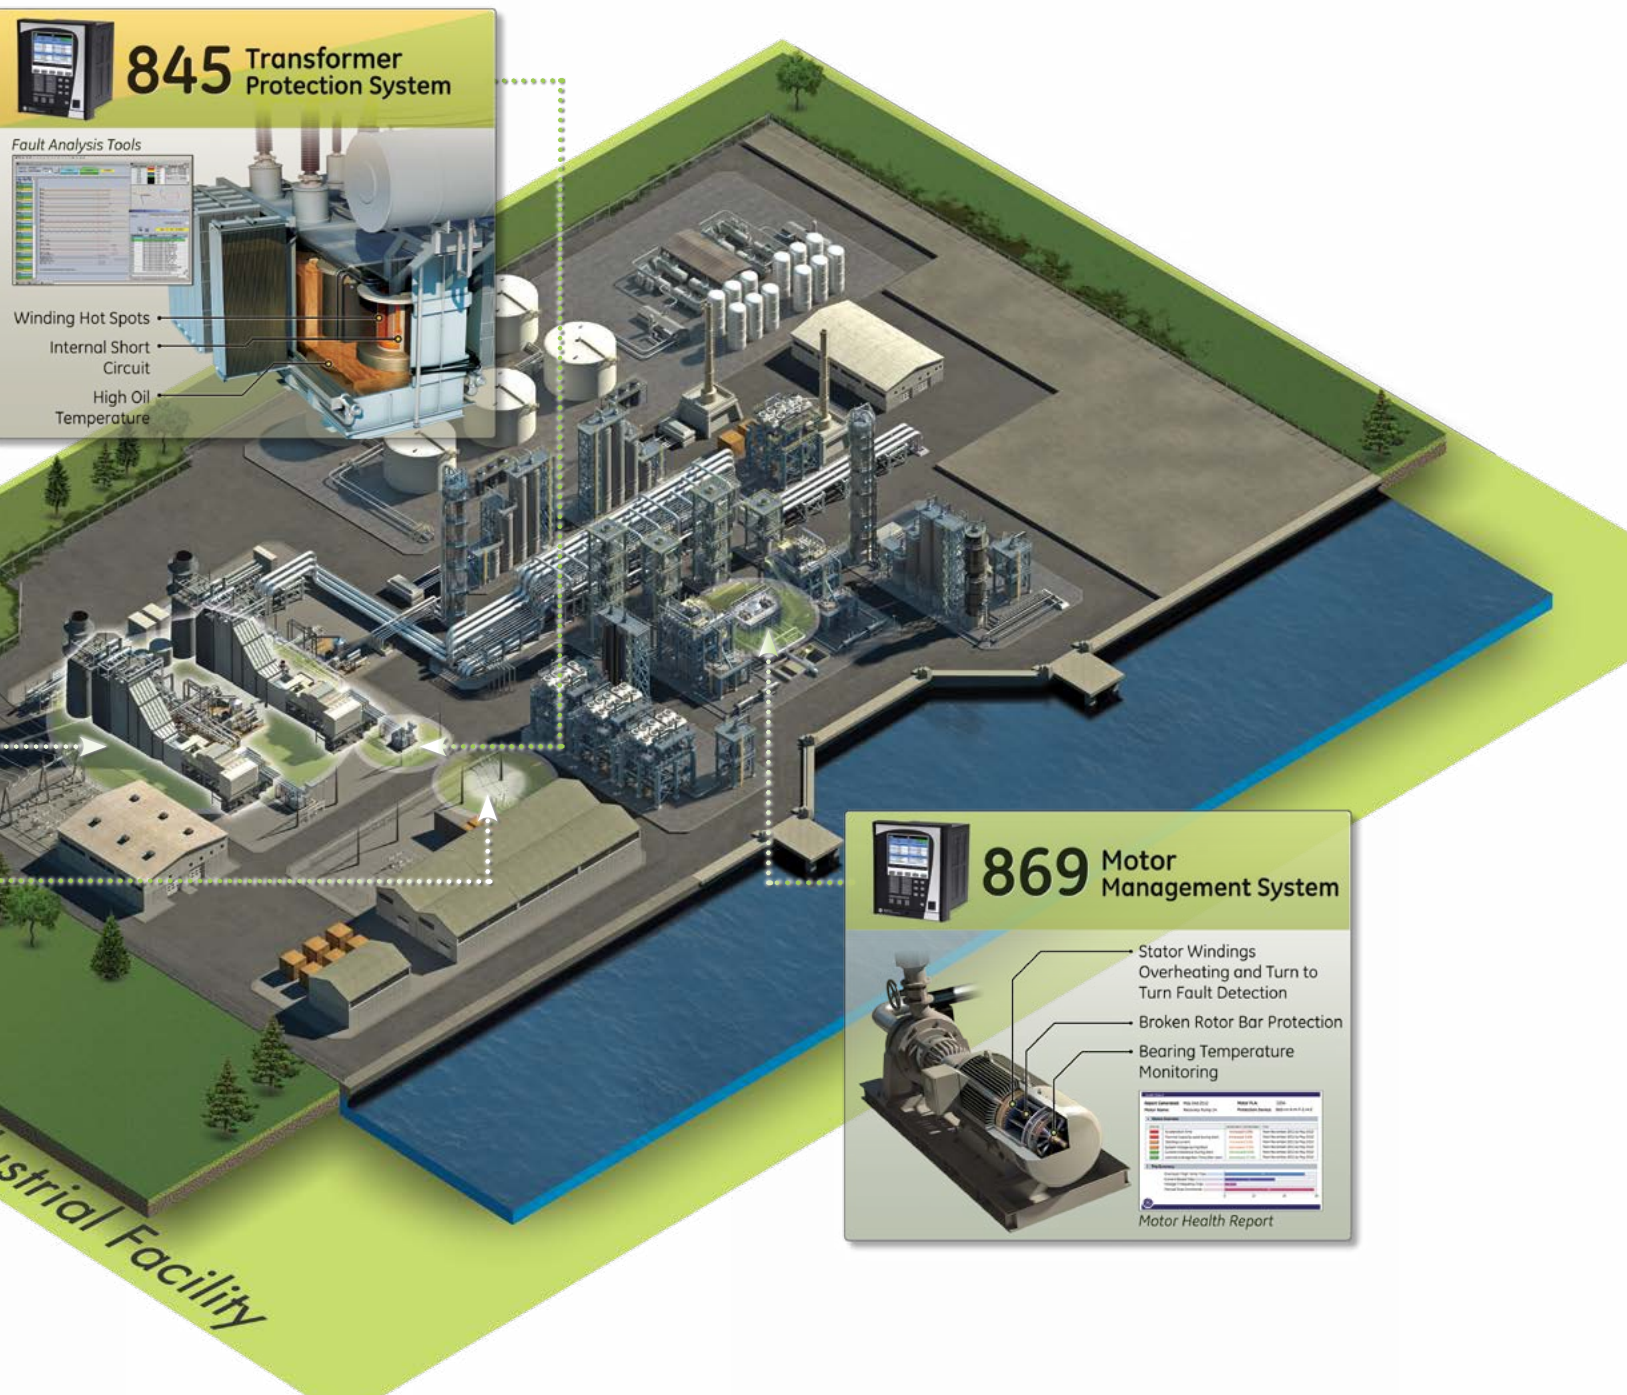

Exceptional Quality & Reliability

Industry-leading quality, reliability and design processes are at the core of GE's next generation protective relay platform. With significant investments in state-of-the-art type test facilities that simulate a complete range of operating environments and designed to the IPC A-610 Class 3 standard, adhering to the highest reliability standards and ensuring rugged performance, each device completes one hundred percent Electrical Stress Screening prior to shipping from GE's facility.

The Multilin 8 Series Protection Relays are manufactured in an ISO® 9001:2008 certified manufacturing facility.

Pioneering Technology & Design

The Multilin 850 is part of the 8 Series platform that provides comprehensive, high performance protection and control for critical assets in Industrial and utility environment.

For main-tie-main configurations, the Multilin 850 delivers a more economical and reliable solution, enabling customers to reduce hardware requirements and simplify device integration, including safe and secure Wi-Fi communications for system configuration and diagnostics.

Utilizing decades of experience, GE has implemented ease-of-use features, such as single screen set-ups delivering faster feeder configuration, configurable scheme logic that eliminates the need for complex end-user programming, driving quicker setup times, decreased implementation costs and reduced points of failure.

The Multilin 8 Series products have an integrated protection integrity engine that utilizes customized algorithms, providing advanced diagnostics to ensure asset protection is not compromised.

Maintaining and safeguarding the electrical supply of an operation is critical to ensuring maximum process availability and performance.


The 8 Series incorporates the latest cyber security features, including password complexity, RADIUS authentication, role-based access control (RBAC), customers to comply with NERC CIP and NISTIR 7628 requirements.

Understanding that customers need protection and control devices that must reliably operate in extremely harsh and challenging environments, GE delivers the Multilin 850 with harsh conformal coating on all printed circuit boards and a patented environmental awareness module that provides real-time detection of environmental factors that affect product life, as part of its standard offering, delivering higher reliability and extended relay life.

Uncompromised Service and Support

Designed, manufactured and tested to the highest standards in the industry at our state-of-the-art facilities, the Multilin 8 Series delivers maximum performance for today's most demanding environments.

In addition to the superior technology and innovative design advancements that enable delivery of uncompromised performance and reliability, the Multilin 8 Series is also backed by GE's 10 year warranty plan.

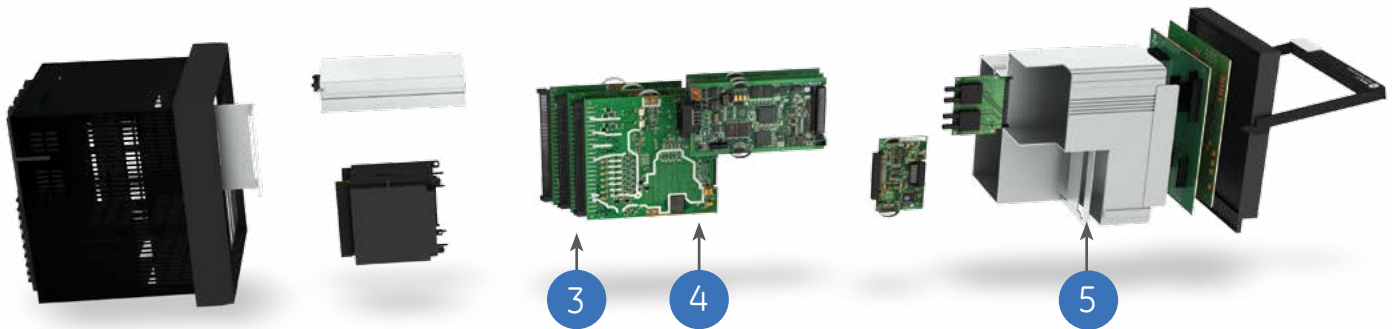

1 Field Swappable Power Supply

Extends the usable life of the protection relay and minimizes costly, time consuming replacement and re-configuration.

2 Harsh Environment Conformal Coating

Standard on all printed circuit boards delivering higher reliability and extended relay life

3 No Electrolytic Capacitors

Increasing quality and reliability for continuous plant operations by removing high failure components

4 IPC A-610 Class 3 Manufacturing

Drives to the highest level of reliability standards delivering rugged performance

5 Robust Extruded Aluminum Chassis

Custom-designed extruded aluminum chassis delivering optimal operating performance

6 Draw-Out

Providing simplified device fleet management

Multilin 850 Overview

The Multilin 850 feeder Protection System is a protection device designed for the management, protection and control of incoming and outgoing feeders. The 850 provides comprehensive protection and control for these various feeders.

The 850 relay offers the ideal solution for protecting, monitoring and controlling feeders from disturbances or faults. With a fast protection pass, running every 2 msec, the 850 relay provides faster response to current, voltage, power, and frequency protection elements. Supporting the latest in industry standard communication protocols, including IEC 62439/PRP and IEC 61850, the Multilin 850 relay easily integrates into new or existing networks.

The 850 is an advanced feeder protection relay that provides high performance protection, extensive programmable logic and flexible configuration capabilities. With protection and control logic, the 850 allows for simplified coordination with upstream and downstream disconnect devices. This advanced protection relay also offers enhanced features, such as diagnostics, preventative maintenance, condition monitoring, security, and advanced communications options.

Protection & Control

As part of the 8 Series family, the Multilin 850 provides superior protection and control. The 850 offers comprehensive protection and control solutions for incoming, outgoing bus-tie/bus-coupler feeders. It contains a full range of selectively enabled, self contained protection and control elements.

- Phase/Neutral/Ground Time Overcurrent (51P/N/G)
- Phase/Neutral/Ground Instantaneous Overcurrent (50P/N/G)
- Phase Directional Overcurrent (67P)
- Voltage and Frequency Protection
- Synchrocheck (25)
- Autoreclose (79)
- AR Current Supervision And AR Zone Coordination

The voltage and frequency protection functions detect abnormal system conditions, potentially hazardous to the system. Some of these conditions may consist of over and undervoltage, over and underfrequency, and phase reversal.

FlexCurves™

For applications that require greater flexibility, FlexCurves can be used to define custom curve shapes. These curves can be used to coordinate with other feeders to achieve fault selectivity.

Advanced Automation

The Multilin 850 incorporates advanced automation capabilities that exceeds what is found in most motor protection relay. This reduces the need for additional programmable controllers or discrete control relays including programmable logic, communication, and SCADA devices. Advanced Automation also facilitates the Multilin 850 to integrate seamlessly with other protection/process systems.

FlexLogic™

FlexLogic is the powerful programming logic engine that provides the ability to create customized protection and control schemes, minimizing the need and associated costs of auxiliary components and wiring. Using FlexLogic, the 850 can be programmed to provide the required tripping logic along with custom scheme logic for feeder control interlocking schemes with adjacent protections (for example, preventing sympathetic tripping of healthy feeders), and dynamic setting group changes.

Monitoring & Diagnostics


The Multilin 850 includes high accuracy metering and recording for all AC signals. Voltage, current, and power metering are built into the relay as a standard feature. Current and voltage parameters are available as total RMS magnitude, and as fundamental frequency magnitude and angle.

Breaker Health Monitoring

The breaker is monitored by the relay not only for detection of breaker failure, but also for the overall “breaker health” which includes:

- Breaker close and breaker open times
- Trip circuit monitoring
- Spring charging time
- Per-phase arcing current
- Trip counters

All algorithms provide the user with the flexibility to set up initial breaker trip counter conditions and define the criteria for breaker wear throughout a number of set points.

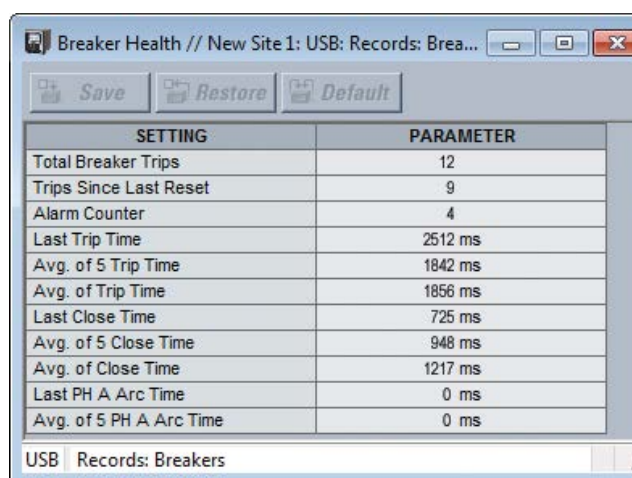

The screenshot shows a software window titled "Breaker Health // New Site 1: USB: Records: Brea...". It has buttons for "Save", "Restore", and "Default". Below these is a table with two columns: "SETTING" and "PARAMETER".

SETTING	PARAMETER
Total Breaker Trips	12
Trips Since Last Reset	9
Alarm Counter	4
Last Trip Time	2512 ms
Avg. of 5 Trip Time	1842 ms
Avg. of Trip Time	1856 ms
Last Close Time	725 ms
Avg. of 5 Close Time	948 ms
Avg. of Close Time	1217 ms
Last PH A Arc Time	0 ms
Avg. of 5 PH A Arc Time	0 ms


At the bottom of the window, there is a status bar that says "USB Records: Breakers".

Multilin 8 Series Breaker Health Report available on display or via the setup software

Environmental Monitoring

The 850 implements a patented environmental monitoring system that measures and provides operating condition information. Reliable and secure operation of the 850 relay and other electronic devices in the vicinity may be affected by environmental factors. The 850 relay has been designed to meet or exceed all required industry standards, however some operating conditions may be beyond those standards and reduce total lifespan of the device.

Typical environmental conditions that may affect electronic device reliability include voltage, current density, temperature, humidity, gas, dust, contamination, mechanical stress, shock, radiation, and intensity of electrical and magnetic fields. These environmental factors are different from natural weather conditions at particular installation conditions and are beneficial to monitor. The 850 relay's built-in environmental awareness feature (patent "Systems and methods for predicting maintenance of intelligent electronic devices") collects the histograms of each operating condition from the point the device is put into service. Monitored environmental conditions include temperature, humidity and transient voltage. The histogram of each environmental factor may be retrieved from the diagnostic page accessed through a PC running the EnerVista Multilin 8 Series Setup program.

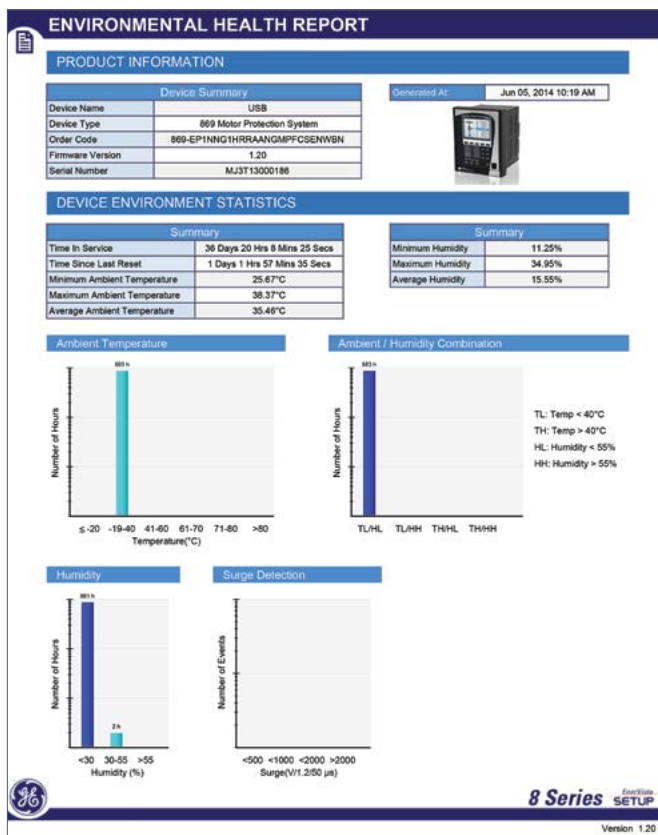


Environmental health report is available via Multilin PC Software

Metering

The Multilin 850 offers high accuracy power quality monitoring for fault and system disturbance analysis. The Multilin 8 Series delivers unmatched power system analytics through the following advanced features and monitoring and recording tools:

- Harmonics measurement up to 25th harmonic for both currents and voltages including THD.
- The length of the transient recorder record ranges from 31 cycles to 1549 cycles, depending on the user specified configuration. -- This gives the user ability to capture long disturbance records which is critical for some applications.

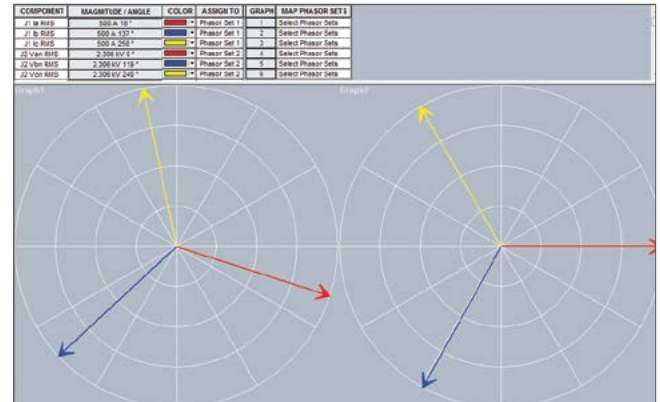

Multilin 850 Phasor viewer

- 32 digital points and 16 analog values, assigned by the user, can be captured in the COMTRADE format by the transient recorder.
- Comprehensive data logger provides the recording of 16 analog values selected from any analog values calculated by the relay. Capture rates range from 16 ms, 20ms, 1 second, 30 seconds, 1 minute, 30 minutes, or 1 hour rate. This data capture flexibility allows the operator to measure power factor or reactive power flow (for example), for several hours or even days, enabling detailed analysis and corrective action to be taken, if required.
- Detailed Fault Report allows the user to identify the fault location, fault type and element(s) that triggered the 850 to trip. It carries other useful information, such as pre-fault and fault phasors, relay name and model, firmware revision and other details. The 850 stores fault reports for the last 16 events. 1024 Event Recorder chronologically lists all triggered elements with an accurate time stamp over a long period of time. The 850 stores the last 1024 events locally in the relay.


The screenshot displays two windows from the 850 monitoring system. The top window, titled "Events // New Site 1: USB: Records", shows a list of events with columns for Event Number, Date/Time, and Cause. The bottom window, titled "Harmonics 1 - J1 Current // New Site 1: USB: Me...", displays a table of harmonic settings and parameters.

Event Number	Date/Time	Cause
24154	Jun 5 2014 13:57:40.709625	Motor Tripped
24153	Jun 5 2014 13:57:40.576361	Motor Running
24152	Jun 5 2014 13:54:09.376890	Trip On
24151	Jun 5 2014 13:54:09.374807	Thermal Trip OP
24150	Jun 5 2014 13:54:09.374807	Setting Change
24149	Jun 5 2014 13:54:08.541851	Role Admin Act
24148	Jun 5 2014 13:54:08.258667	Login
24147	Jun 5 2014 13:53:40.138449	Motor Overload
24146	Jun 5 2014 13:53:31.109323	Motor Running
24145	Jun 5 2014 13:53:27.460975	Motor Starting
24144	Jun 5 2014 13:53:24.394397	Motor Stopped
24143	Jun 5 2014 13:53:22.778460	Motor Running

SETTING	PARAMETER
J1 Phase A THD	27.8 %
J1 Phase B THD	0.0 %
J1 Phase C THD	0.1 %
J1 Phase A 2	27.8 %
J1 Phase B 2	0.0 %
J1 Phase C 2	0.1 %
J1 Phase A 3	0.0 %
J1 Phase B 3	0.0 %
J1 Phase C 3	0.0 %

Multilin 850 Event Recorder

The 850 monitoring system performance with harmonic analysis

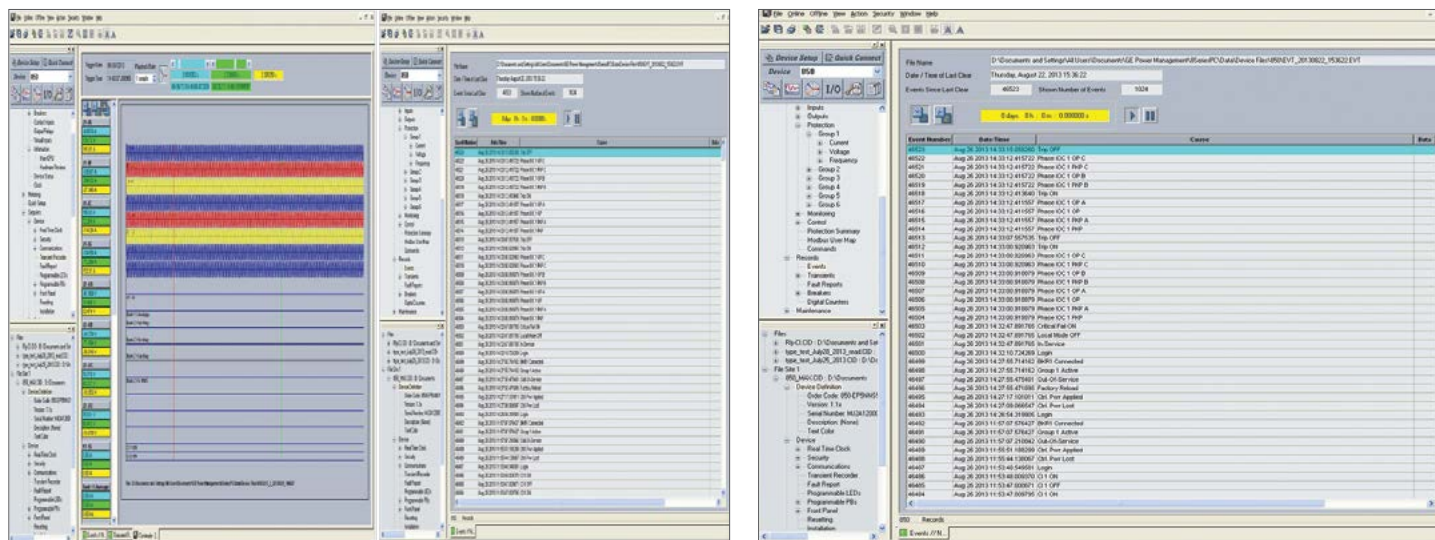

The 850 monitoring system performance with oscillography and event records

Communications

The 850 provides advanced communications technologies for remote data and engineering access, making it easy and flexible to use and integrate into new and existing infrastructures. Direct support for fiber optic Ethernet provides high-bandwidth communications, allowing for low-latency controls and high-speed file transfers of relay fault and event record information. The 850 also supports two independent IP addresses, providing high flexibility for the most challenging of communication networks.

Providing several Ethernet and serial port options and supporting a wide range of industry standard protocols, the 850 enables easy, direct integration into DCS and SCADA systems. The 850 supports the following protocols:

- IEC 61850, IEC 62439 / PRP
- DNP 3.0 serial, DNP 3.0 TCP/IP,, IEC 60870-5-103, IEC 60870-5-104
- Modbus RTU, Modbus TCP/IP

The 850 has two interfaces as USB front port and Wi-Fi for ease of access to the relay.

Wi-Fi Connectivity:

- Simplify set-up and configuration
- Simplify diagnostic retrieval
- Eliminate personnel in front of switchgear
- WPA-2 security



Cyber Security

The 850 cyber security enables the device to deliver full cyber security features that help operators to comply with NERC CIP guidelines and regulations.

AAA Server Support (Radius/LDAP)

Enables integration with centrally managed authentication and accounting of all user activities and uses modern industry best practices and standards that meet and exceed NERC CIP requirements for authentication and password management.

Role Based Access Control (RBAC)

Efficiently administrate users and roles within UR devices. The new and advanced access functions allow users to configure up to five roles for up to eight configurable users with independent passwords. The standard "Remote Authentication Dial In User Service" (Radius) is used for authentication.

Event Recorder (Syslog for SEM)

Capture all cyber security related events within a SOE element (login, logout, invalid password attempts, remote/local access, user in session, settings change, FW update, etc), and then serve and classify data by security level using standard Syslog data format. This will enable integration with established SEM (Security Event Management) systems.



Cyber Security with Radius Authentication

Software & Configuration

The EnerVista™ suite is an industry-leading set of software programs that simplifies every aspect of using the Multilin 850. EnerVista provides all the tools to monitor the status of the protected asset, maintain the device and integrate the information measured by the Multilin 8 Series, into SCADA or DCS process control systems. The ability to easily view sequence of events is an integral part of the setup software, as postmortem event analysis is critical to proper system management.

EnerVista Launchpad

EnerVista Launchpad is a powerful software package that provides users with all of the setup and support tools needed for configuring and maintaining Multilin products. The setup tools within Launchpad allow for the configuration of devices in real-time, by communicating via serial,

Ethernet or modem connections, or offline by creating device setting files to be sent to devices at a later time. Included in Launchpad is a document archiving and management system that ensures critical documentation is up-to-date and available when needed.

8 Series Setup Software

8 Series Setup Software is single setup and configuration across the platform and can reduce device setup and configuration time.

Application Challenge: Intelligent Load Shedding

Challenge:

In a multiple power source network, it may happen that some power sources are lost utility circuit creating deficit of the power even with a presence of in-facility generator. In these partially islanding situations the deficit of active power may result in a sudden drop of system frequency resulting in power system instability, bringing the processes and operations to a halt.

Solution:

Being able to dynamically balance and maintain loads in this type of separation scenario requires an intelligent device that has advanced communications, automation and control logic capabilities. The Multilin 850 provides distribution networks and industrial facilities with the system stability functionality and cost saving options, required to maintain power system availability and process continuity. With advanced protection features including underfrequency, overfrequency, frequency rate of change, sensitive reverse power, underfrequency restoration and other elements plus superior communications enabling sharing data with other IEDs, distribution utilities and industrial facilities rely on Multilin's 850 to deliver reliability, efficiency and security to the power system.

Application Challenge: Modern Feeder Protection

Challenge:

Utilities and industrial facilities depend on reliable and secure electricity services to keep their operations running. Regardless of the type of source, a fully integrated protection & control scheme is critical to maintaining uninterrupted power to the entire facility.

Solution:

The Multilin 8 Series offers the ideal solution for protecting, monitoring and controlling electrical cables and overhead lines from disturbances or faults. With a fast protection pass, running every 2 msec, the 8 Series provides unmatched overcurrent, overvoltage, undervoltage, and frequency protection. Supporting the latest in industry standard communication protocols, including IEC 62439/PRP and IEC 61850, the Multilin 8 Series easily integrates into new or existing networks.

Simplified Setup and On-Going Maintenance

The robust 850 streamlines user workflow processes and simplifies engineering tasks, such as configuration, wiring, testing, commissioning, and maintenance. Building on the history of simplified setup and configuration, the 850 Feeder Protection Relay has implemented simplified setup screens to minimize relay setup time. In addition, for local programming, the 850 comes with a fully functional GCP, which allows users to locally monitor the asset.

Ease-of-Use

Continuing its legacy in providing easy-to-use protective relay solutions, the 850 is designed to minimize product and system configurability requirements, for quicker physical installations, easier and simplified setup and configuration.

1 Easy to Use - Draw-out case



2 Easy to Configure - 1 simple step



3 Detailed Diagnostics



Full Color Graphical HMI Front Display

A large, full color Graphic Control Panel (GCP) ensures clear representation of critical status and measurements. When the keypad and display are not being used, the GCP will automatically revert to screen saver mode, which will turn off the display until one of the local pushbuttons is pushed.

The GCP can be used to view device and system status, alarms and event logs, and metering information. The GCP and navigation keys simplify relay configuration and setup, allowing users to make setting changes directly through the front panel.

LED Indicators for Quick Status Indication

The front panel includes user configurable LED's. Each LED can be completely configured and named based on the application and user requirements. The color of each indicator conveys its importance.


G = Green: General Condition

A = Amber: Alert Condition

R = Red: Serious Alarm or Important Status

The 850 front panel provides 14 LED indicators and 3 LED pushbutton indicators. 10 LED's are user-programmable, while "In service" and "Pickup" LED's are non-programmable. "Trip" and "Alarm" LED's are not color programmable but can be assigned with selected operands.


User-programmable LED's can be turned on by a selection of FlexLogic operands representing protection, control or monitoring elements. Each LED can be configured to be self-reset or latched and labeled based on the application and user requirements. User-programmable LED's can be selected to be either Red, Green or Orange to give the distinctive indication of selected operations.

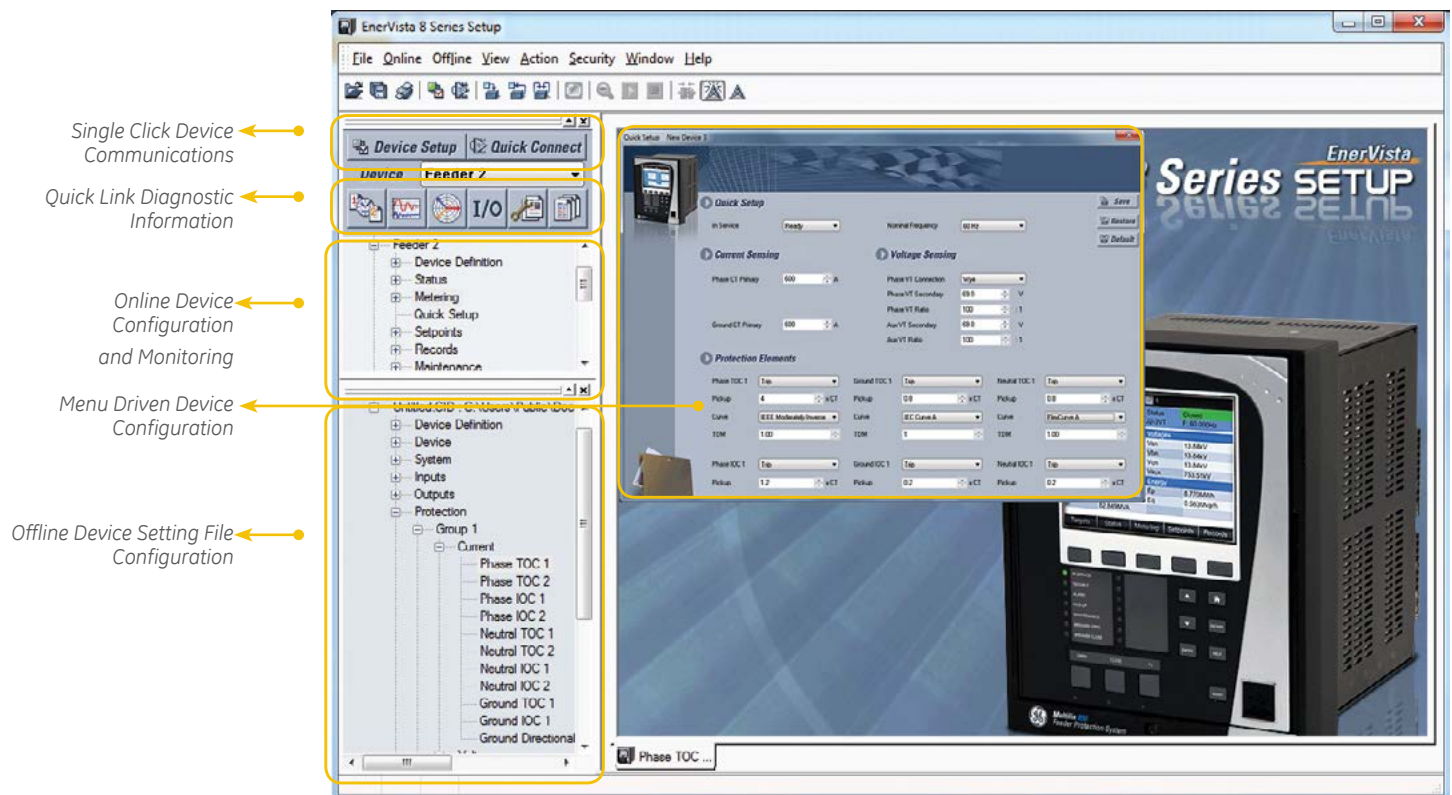

Front View



Rear View

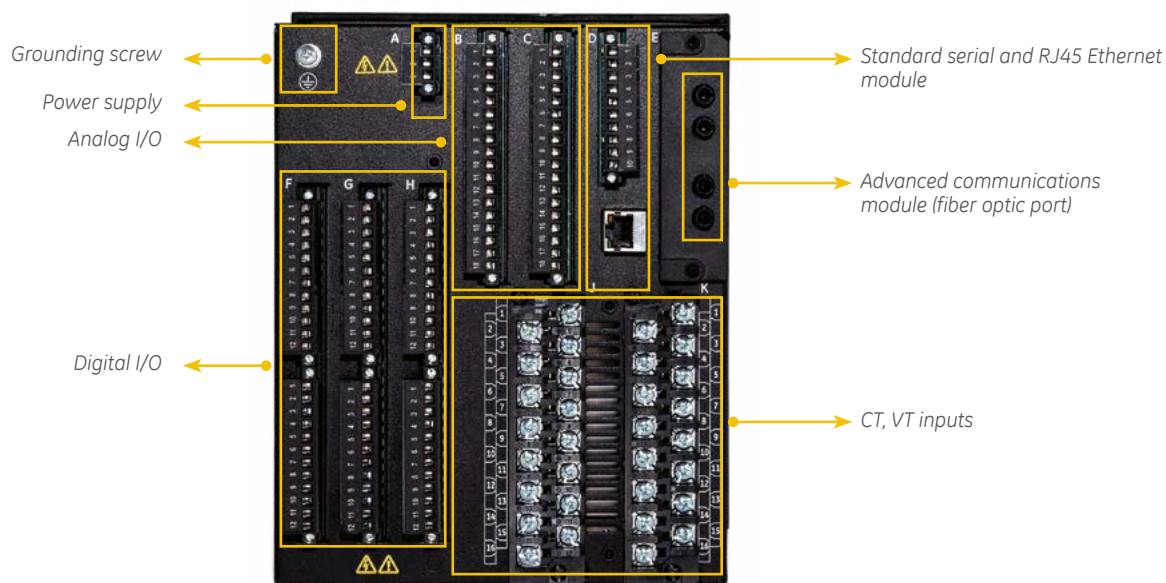


Technical Application Example 1: Industrial Auto Transfer Schemes

Challenge

Bus or source transfer solutions are often necessary for industrial facilities to ensure power reliability and process continuity. Being able to rapidly transfer sources was often accomplished through a complex combination of discrete and auxiliary relays, timers, and/or programmable logic controllers, all wired together. The usage of these independent devices required a precise sequencing of interlocks, timing, and functions to ensure no momentary loss of power could potentially damage critical equipment or loads. In addition, the large number of physical I/O required made these schemes expensive to design and implement and difficult to test.

Solution

The Multilin 850 offers seamless automated bus transfer scheme solutions, maximizing system availability and process uptime. Using a minimal amount of programming, the 850 eliminates the need for any discrete devices and device inter-wiring by integrating all the functions directly into the intelligent device. With advanced communications including embedded support for IEC 61850 peer-to-peer communications, inter-relay wiring and physical I/O can be eliminated. The 850 provides a reliable, automatic bus transfer solution that is easy to design, configure, and maintain.

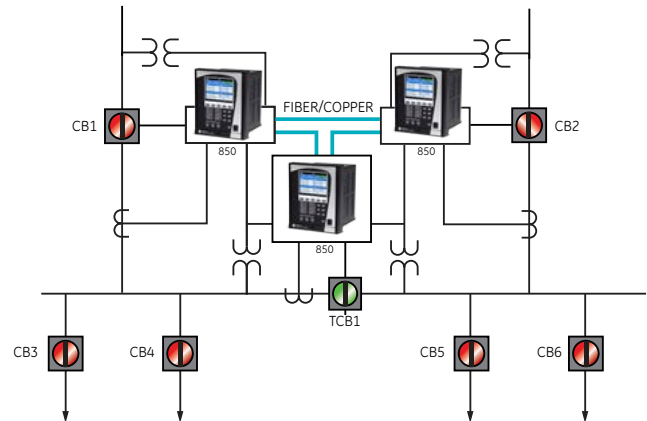


Technical Application Example 2: Zone Selective Interlocking

Challenge

A Fault in an industrial or utility system is a catastrophic event that causes severe damage to equipment and often results in extended system and process downtime. These events require a solution that can quickly and reliably detect and issue a coordinated trip command to clear the fault as fast as possible, reducing total incident energy, equipment damage and system downtime.

Solution

With embedded support for IEC 61850, the 850 provides high-speed data exchange between relays for fast reaction to system issues. As a coordinated system, interlocked protection can be enabled, to provide the necessary bus protection. Fast clearance can be achieved for a fault that occurs at any feeder or bus location by quickly exchanging signals to discriminate the fault location.

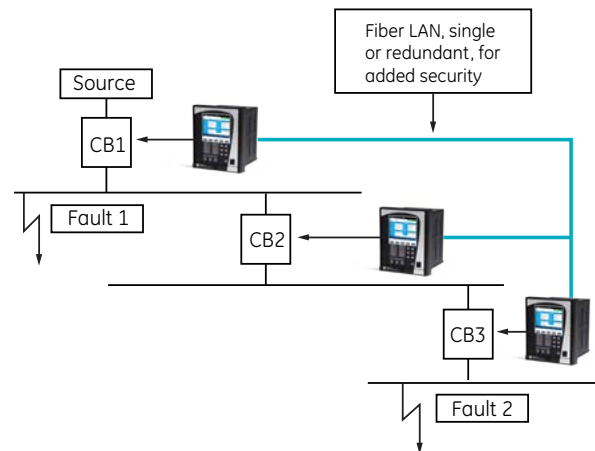

Technical Application Example 3: Intelligent Auto-Reclose

Challenge


A majority of faults that occur on overhead lines are transient in nature, meaning that the fault does not recur when the line is re-energized after tripping. However, in the event the fault is present after the 1st reclose attempt, there is a good possibility that next reclose attempts will be successful and power supply to the customer will be restored. Therefore, in order to maintain system availability and security, utility operators need an intelligent auto-reclose solution that allows them to automatically attempt to re-energize a line multiple times, depending on the system conditions and user requirements. Today's environment requires integrated solutions into digital relays.

In modern feeder topology, substation relay auto-reclose functions should maintain coordination with downstream reclosures installed along the feeder.

Solution

For customers wanting a reliable and customized auto-reclose scheme, a device with integrated logic capabilities is necessary. The 850 offers comprehensive protection and auto-reclose functions integrated in one box.

Up to four auto-reclose operations are possible, each with a programmable dead time. For each reclose shot, the relay can be programmed to block IOC elements, and to adjust the curve characteristics of any TOC element. The number of shots can be reduced by high currents. Maximum rate per hour

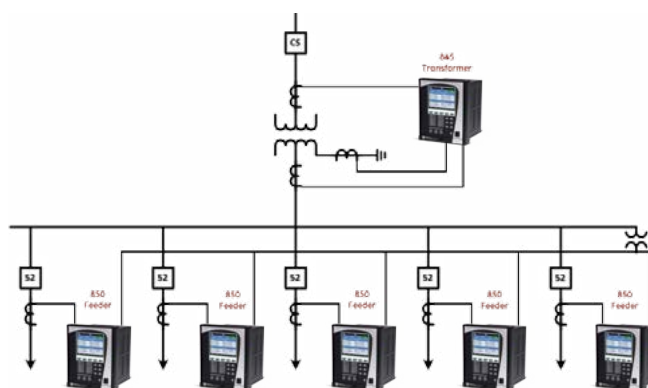

reclose shots would prevent breaker drive and insulation overstressing.

850 relay can be programmed to change protection setting every time the downstream reclosure operates and also maintain same reclosure count as downstream reclosure.

Technical Application Example 4: Adaptive Protection


Challenge:

To effectively manage an electrical system, operators need the ability and flexibility to change power output on a seasonally or even hourly basis due to scheduled maintenance, seasonal load changes and transfers, scheduled switching, transformer inrush or motor starting currents. These changes could have an adverse effect on the reliability of the system and connected loads and requires a protection device that can adapt to ensure secure and dependable protection.


One such application where dynamic setting group change ability is ideal, is with a parallel feeder application where two lines are in service and carry a portion of the required load. If there is an unplanned outage with one of the feeder lines, such that all loads are now supplied by one feeder, key protection settings would need to be adjusted to ensure proper coordination with downstream devices and deliver secure reliable service.

Solution:

The Multilin 850 offers effective, reliable management of feeders. With dynamic, sensitive settings, the 850 provides secure and dependable protection. With six setting groups the 850 provides the sensitive settings range and groups required to ensure no compromise is made to meet changing system conditions. These setting groups can be enabled automatically or manually to address system needs, ensuring greater system reliability and efficiency.

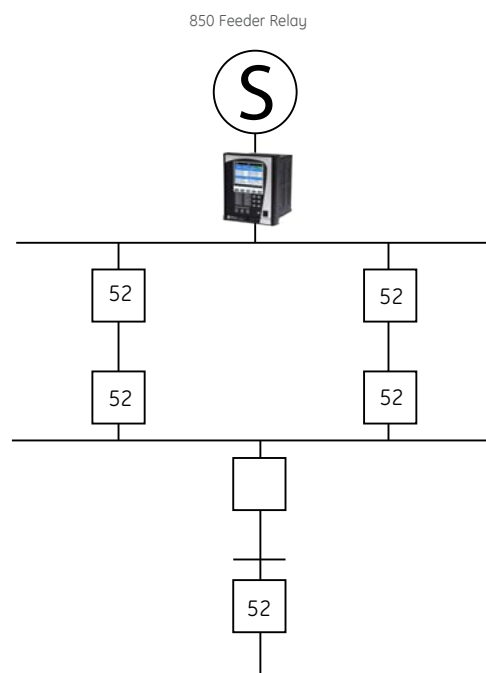

Functional Block Diagram

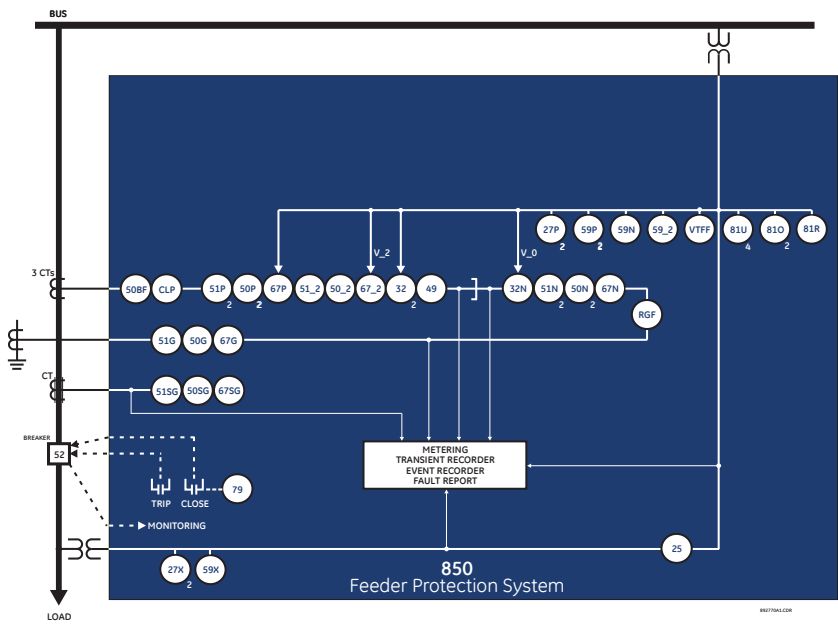


ANSI Device	Description
25	Synchrocheck
27P (2)	Phase Undervoltage
32 (2)	Directional Power
32N	Wattmetric Ground Fault (Wattmetric zero sequence directional)
27X (2)	Auxiliary Undervoltage
49	Cable Thermal Model
50BF	Breaker Failure
50G	Ground Instantaneous Overcurrent
50SG	Sensitive Ground Instantaneous Overcurrent
50N (2)	Neutral Instantaneous Overcurrent
50P (2)	Phase Instantaneous Overcurrent
50_2	Negative Sequence Instantaneous Overcurrent
51G	Ground Time Overcurrent
51SG	Sensitive Ground Time Overcurrent
51N (2)	Neutral Time Overcurrent
51P (2)	Phase Time Overcurrent
51_2	Negative Sequence Time Overcurrent
52	AC Circuit Breaker
59N	Neutral Overvoltage
59P (2)	Phase Overvoltage
59X	Auxiliary Overvoltage
59_2	Negative Sequence Overvoltage
67G	Ground Directional Element
67SG	Sensitive Ground Directional Element
67N	Neutral Directional Element
67P	Phase Directional Element
67_2	Negative Sequence Directional Element
79	Automatic Recloser
81O	Overfrequency
81U (4)	Underfrequency
81R	Frequency Rate of Change
87G	Restricted Ground Fault
I2/I1	Broken Conductor
VTFF	Voltage Transformer Fuse Failure

Dimensions & Mounting



Typical Wiring

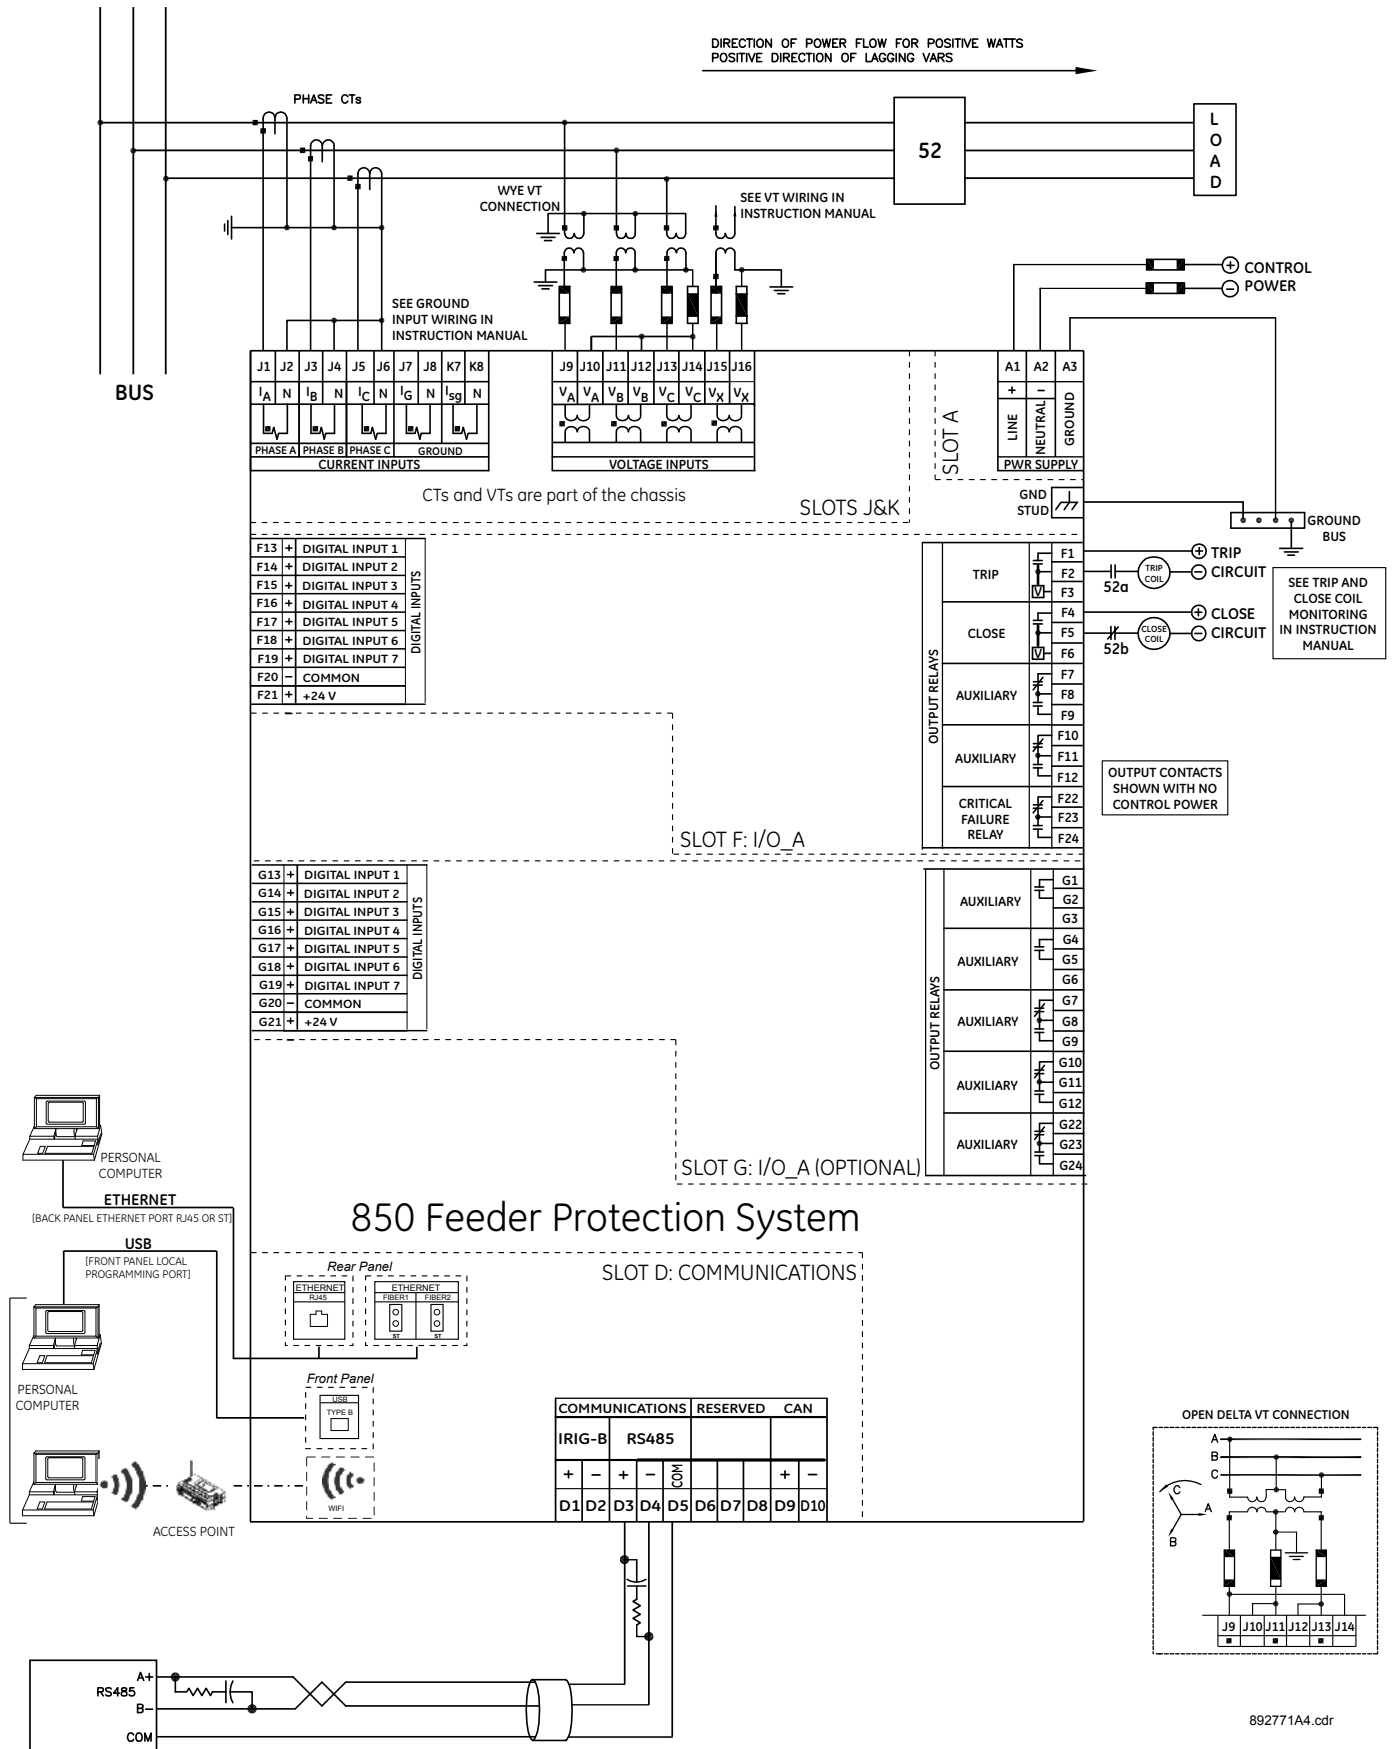

Technical Specifications

POWER SUPPLY	
Power Supply	
Nominal DC Voltage	125 to 250 V
Minimum DC Voltage	88 V
Maximum DC Voltage	300 V
Nominal AC Voltage	100 to 240 V at 50/60 Hz
Minimum AC Voltage	88 V at 50/60 Hz
Maximum AC Voltage	265 V at 50 to 60 Hz
Voltage loss ride through	20 ms duration
Power Consumption	
Typical	10 to 15 W/VA
Maximum	18 W/ 56VA
INPUTS	
AC Currents	
CT Rated Primary:	1 to 12000 A
CT Rated Secondary	1 A or 5 A based on relay ordering
Nominal Frequency	50 and 60 Hz
AC Voltage	
VT Range	10 to 260 V
Nominal Frequency	20 to 65 Hz
Burden	<0.25 VA at 120 V
Conversion Range.	1 to 275 V
Voltage Withstand	Continuous at 260 V to neutral 1 min/hr at 420 V to neutral
OUTPUTS	
Form-A Relays	
Configuration	2 (two) electromechanical
Contact material	silver-alloy
Operate time	<8 ms
Continuous current	10 A
Make and carry for 0.2s	30 A per ANSI C37.90
Break (DC inductive, L/R=40 ms)	24 V / 1 A 48 V / 0.5 A 125 V / 0.3 A 250 V / 0.2 A
Break (DC resistive)	24 V / 10 A 48 V / 6 A 125 V / 0.5 A 250 V / 0.3 A
Break (AC inductive)	720 VA @ 250 VAC Pilot duty A300
Break (AC resistive)	277 VAC / 10 A
Form-A Voltage Monitor	
Applicable voltage	20 to 300 VDC
Trickle current	1 to 2.5 mA
Form-C Relays	
Configuration	electromechanical
Contact material	silver-alloy
Operate time	<8 ms
Continuous current	10 A
Make and carry for 0.2s	30 A per ANSI C37.90
Break (DC inductive, L/R=40 ms)	24 V / 1 A 48 V / 0.5 A 125 V / 0.3 A 250 V / 0.2 A
Break (DC resistive)	24 V / 10 A 48 V / 6 A 125 V / 0.5 A 250 V / 0.3 A
Break (AC inductive)	720 VA @ 250 VAC Pilot duty A300
Break (AC resistive)	277 VAC / 10 A
CONTACT INPUTS	
Number of Inputs:	Based on relay ordering
Type	Wet or Dry
Wet Contacts	300 V DC maximum
Selectable thresholds	17, 33, 84, 166 VDC
Tolerance	±10%
Recognition time	1ms (typical)
Debounce time	0.0 to 16.0 ms in steps of 0.5 ms
Continuous current draw	2 mA

PROTECTION	
Phase/Neutral/Ground Time Overcurrent (51)	
Current	Phasor or RMS
Pickup Level	0.050 to 30.000 × CT in steps of 0.001 × CT
Dropout Level	97 to 98% of Pickup
Level Accuracy	For 0.01 to 0.2 × CT: ±0.5% of reading or ±0.4% of rated, whichever is greater; For > 0.2 × CT: ±1.5% of reading
Curve Shape	IEEE Extremely/Very/Moderately Inverse ANSI Extremely/Very/ Normally/Moderately Inverse IEC Curve A/B/C and Short Inverse IAC Extremely/Very/Inverse/Short Inverse FlexCurve™ A, FlexCurve™ B, FlexCurve™ C, FlexCurve™ D I2t, I4t, Definite Time
Curve Multiplier:	0.05 to 600.00 in steps of 0.01
Reset Time	Instantaneous, Timed
Curve Timing Accuracy:	Currents > 1.1 × pickup: ± 3% of operate time or ± ½ cycle (whichever is greater) from pickup to operate

Phase/Neutral/Ground Instantaneous Overcurrent (50P/N/G)	
Current (for Phase IOC only)	Phasor or RMS
Current (for Neutral/ Ground IOC only)	Fundamental Phasor Magnitude
Pickup Level	0.050 to 30.000 × CT in steps of 0.001 × CT
Dropout Level	97 to 98% of Pickup
Level Accuracy	For 0.01 to 0.2 × CT: ±0.5% of reading or ±0.4% of rated, whichever is greater For > 0.2 × CT: ±1.5% of reading
Operate Time	<12 ms typical at >3 × Pickup at 60 Hz (Phase/Ground IOC) <16 ms typical at >3 × Pickup at 60 Hz (Neutral IOC) <15 ms typical at >3 × Pickup at 50 Hz (Phase/Ground IOC) <20 ms at >3 × Pickup at 50 Hz (Neutral IOC)
Timer Accuracy	±3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate

Negative Sequence Instantaneous Overcurrent (50_2)	
Current	I ₂ Fundamental Phasor Magnitude
Pickup Level	0.050 to 30.000 × CT in steps of 0.001 × CT
Dropout Level	97 to 98% of Pickup
Level Accuracy	For 0.1 to 2.0 × CT: ±0.5% of reading or ±0.4% of rated, whichever is greater For > 0.2 × CT: ±1.5% of reading
Curve Multiplier	0.05 to 600.00 in steps of 0.01
Reset Time	Instantaneous, Timed
Curve Timing Accuracy	Currents > 1.1 × pickup: ± 3% of curve delay or ± ½ cycle (whichever is greater) from pickup to operate

Negative Sequence Time Overcurrent (51_2)	
Current	I ₂ Fundamental Phasor Magnitude
Pickup Level	0.050 to 30.000 × CT in steps of 0.001 × CT
Dropout Level	97 to 98% of Pickup
Level Accuracy	For 0.1 to 2.0 × CT: ±0.5% of reading or ±0.4% of rated, whichever is greater For > 0.2 × CT: ±1.5% of reading
Overreach	< 2%
Operate Time	< 12 ms typical at 3 × Pickup at 60 Hz < 15 ms typical at 3 × Pickup at 50 Hz

Timer Accuracy	±3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate
Sensitive Ground Instantaneous Overcurrent (50SG)	
Pickup Level	(Gnd IOC): 0.005 to 3.000 × CT in steps of 0.001 × CT
Dropout Level	97 to 98% of Pickup
Level Accuracy	For 0.1 to 2.0 × CT: ±0.5% of reading or ±0.4% of rated, whichever is greater For > 2.0 × CT: ±1.5% of reading
Operate Time	<12 ms typical at 3 × Pickup at 60 Hz <15 ms typical at 3 × Pickup at 50 Hz
Timer Accuracy	±3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate
Sensitive Ground Time Overcurrent (51SG)	
Pickup Level	0.005 to 3.000 × CT in steps of 0.001 × CT
Dropout Level:	97 to 98% of Pickup
Level Accuracy	For 0.1 to 2.0 × CT: ±0.5% of reading or ±0.4% of rated, whichever is greater For > 2.0 × CT: ±1.5% of reading
Curve Shape	IEEE Extremely/Very/Moderately Inverse, ANSI Extremely/Very/Normally/ Moderately Inverse, IEC Curve A/B/C and Short Inverse, IAC Extreme/Very/Inverse/Short Inverse, FlexCurve™ A, FlexCurve™ B, FlexCurve™ C, FlexCurve™ D, I2t, I4t, Definite Time
Curve Multiplier	0.05 to 600.00 in steps of 0.01
Reset Time	Instantaneous, Timed
Curve Timing Accuracy	Currents > 1.1 × pickup: ± 3% of curve delay or ± 1/2 cycle (whichever is greater) from pickup to operate
Phase Directional Overcurrent (67P)	
Relay Connection:	90° (Quadrature)
Quadrature Voltage:	ABC phase seq.: phase A (Vbc), phase B (Vca), phase C (Vab); ACB phase seq.: phase A (Vcb), phase B (Vac), phase C (Vba)
Polarizing Voltage Threshold:	0.000 to 3.000 × VT in steps of 0.001 × VT
Current Sensitivity Threshold:	0.05 × CT
Characteristic Angle:	0° to 359° in steps of 1°
Angle Accuracy:	± 2°
Operation Time (FlexLogic™ Operands):	Reverse to Forward transition: < 12 ms, typically; Forward to Reverse transition: < 8 ms, typically
Negative sequence directional overcurrent (67_2)	
Directionality	Co-existing forward and reverse
Polarizing	Voltage
Polarizing Voltage:	V ₂
Operating Current:	I ₂
Level Sensing	Negative-sequence: I ₂ – K × I ₁
Restraint, K	0.000 to 0.500 in steps of 0.001
Characteristic Angle	0° to 90° in steps of 1°
Limit Angle	40° to 90° in steps of 1°, independent for forward and reverse
Angle Accuracy	± 2°
Pickup Level	0.050 to 30.000 × CT in steps of 0.001 × CT

Dropout Level	97 to 98% of Pickup
Operate Time	< 12 ms typical at 3 x Pickup at 60 Hz
	< 15 ms typical at 3 x Pickup at 50 Hz

Ground Directional Overcurrent (67G)

Directionality	Co-existing forward and reverse
Polarizing	Voltage, Current, Dual
Polarizing Voltage	V ₀ or V _X
Polarizing Current:	I _{sg}
Operating Current:	I _g
Level Sensing:	I _g , I _{sg}
Characteristic Angle:	-90° to 90° in steps of 1°
Limit Angle	40° to 90° in steps of 1°, independent for forward and reverse
Angle Accuracy	± 2°
Pickup Level	0.050 to 30.000 x CT in steps of 0.001
Dropout Level	97 to 98%
Operate Time (no direction transition):	< 12 ms, typically at 3 x Pickup at 60Hz < 15 ms, typically at 3 x Pickup at 50Hz

Sensitive Ground Directional Overcurrent (67SG)

Directionality:	Co-existing forward and reverse
Polarizing:	Voltage, Current, Dual
Polarizing Voltage:	V ₀ or V _X
Polarizing Current:	I _g
Operating Current:	I _{sg}
Level Sensing:	I _g , I _{sg}
Characteristic Angle:	-90° to 90° in steps of 1°
Limit Angle:	40° to 90° in steps of 1°, independent for forward and reverse
Angle Accuracy:	± 2°
Pickup Level:	0.005 to 3.000 x CT in steps of 0.001 x CT
Dropout Level:	97 to 98%
Operate Time (no direction transition):	< 12 ms typical at 3 x Pickup at 60 Hz < 15 ms typical at 3 x Pickup at 50 Hz
Cold Load Pick up	Outage Time Before Cold
Load and Time Before Reset:	0.000 to 6000.000 s in steps of 0.001 s
Pickup and Dropout Level:	0.050 x CT fixed
Level Accuracy:	± 0.5%
Timer Accuracy:	± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate

Phase Undervoltage (27P)

Voltage:	Fundamental Phasor Magnitude
Minimum Voltage:	0.00 to 1.50 x VT in steps of 0.01 x VT
Pickup Level:	0.00 to 1.50 x VT in steps of 0.01 x VT
Dropout Level:	102 to 103% of pickup
Level Accuracy:	±0.5% of reading from 15 to 208 V
Phases Required for Operation:	Any one, Any two, All three
Undervoltage Curves	Definite Time or Inverse Time
Pickup Time Delay	0.000 to 6000.000 s in steps of 0.001s
Operate Time	< 20 ms at 0.90 x pickup at 60 Hz < 25 ms at 0.90 x pickup at 50 Hz
Curve Timing Accuracy	at < 0.90 x pickup: ± 3.5% of curve delay or ± ½ cycle (whichever is greater) from pickup to operate

Auxiliary Undervoltage (27x)

Minimum Voltage	0.00 to 1.50 x VT in steps of 0.01 x VT
-----------------	-----------------------------------------

Pickup Level	0.00 to 1.50 x VT in steps of 0.01 x VT
Dropout Level	102 to 103% of pickup
Level Accuracy	±0.5% of reading from 15 to 208 V Undervoltage Curves Definite Time or GE IAV Inverse Time
Pickup Time Delay	0.000 to 6000.000 s in steps of 0.001s
Operate Time	< 20 ms at 0.90 x pickup at 60 Hz < 25 ms at 0.90 x pickup at 50 Hz
Curve Timing Accuracy	at < 0.90 x pickup: ± 3.5% of curve delay or ± ½ cycle (whichever is greater) from pickup to operate

Phase Overvoltage (59P)

Voltage:	Fundamental Phasor Magnitude
Pickup level:	0.02 to 3.00 x VT in steps of 0.01 x VT
Dropout level:	97 to 98% of Pickup
Level accuracy:	±0.5% of reading from 10 to 208 V
Phases for operation:	Any one, Any two, All three
Pickup time delay:	0.000 to 6000.00 s in steps of 0.001 s (definite time)
Dropout time delay:	0.000 to 6000.00 s in steps of 0.001 s (definite time)
Operate time:	< 25 ms at 1.1 x pickup at 60Hz < 30 ms at 1.1 x pickup at 50Hz
Timer accuracy:	± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate

Negative Sequence Overvoltage (59_2)

Pickup Level	0.00 to 3.00 x VT in steps of 0.01 x VT
Dropout Level	97 to 98% of Pickup
Level Accuracy	± 0.5% of reading from 15 to 208 V
Pickup Time Delay	0.000 to 6000.000 s in steps of 0.001 s
Dropout Time Delay	0.000 to 6000.000 s in steps of 0.001 s
Operate Time	< 25 ms at 1.1 x pickup at 60 Hz < 30 ms at 1.1 x pickup at 50 Hz
Timer Accuracy	± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate

Neutral Overvoltage (59N)

Pickup Level	0.02 to 3.00 x VT in steps of 0.01 x VT
Dropout Level	97 to 98% of Pickup
Level Accuracy	±0.5% of reading from 10 to 208 V
Curves Definite time	Flex Curve A,B,C,D
Pickup Time Delay	0.000 to 6000.000 s in steps of 0.001s (Definite Time)
Dropout Time Delay	0.000 to 6000.000 s in steps of 0.001s (Definite Time)
Operate Time	< 25 ms at 1.1 x pickup at 60Hz < 30 ms at 1.1 x pickup at 50Hz
Curve Timing Accuracy	at > 1.1 x Pickup ± 3% of curve delay or ± 1 cycle (whichever is greater) from pickup to operate

Auxiliary Overvoltage (59X)

Pickup Level	0.00 to 3.00 x VT in steps of 0.01 x VT
Dropout Level	97 to 98% of Pickup
Level Accuracy	±0.5% of reading from 10 to 208 V
Pickup Time Delay	0.000 to 6000.000 s in steps of 0.001s
Dropout Time Delay	0.000 to 6000.000 s in steps of 0.001s
Operate Time	< 25 ms at 1.1 x pickup at 60Hz < 30 ms at 1.1 x pickup at 50Hz
Timer Accuracy	± 3% of operate time or ± ¼ cycle (whichever is greater) from pickup to operate

Overfrequency (81O)

Pickup Level:	20.00 to 65.00 Hz in steps of 0.01
Dropout Level:	Pickup - 0.03 Hz
Pickup Time Delay:	0.000 to 6000.000 s in steps of 0.001 s
Dropout Time Delay:	0.000 to 6000.000 s in steps of 0.001 s
Minimum Operating Voltage:	0.000 to 1.250 x VT in steps of 0.001 x VT
Level Accuracy:	± 0.001 Hz
Timer Accuracy:	± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate
Operate Time:	typically 7.5 cycles at 0.1 Hz/s change typically 7 cycles at 0.3 Hz/s change typically 6.5 cycles at 0.5 Hz/s change

Underfrequency (81U)

Pickup level:	20.00 to 65.00 Hz in steps of 0.01
Dropout level:	Pickup + 0.03 Hz
Pickup time delay:	0.000 to 6000.000 s in steps of 0.001 s
Dropout time delay:	0.000 to 6000.000 s in steps of 0.001 s
Minimum operating voltage:	0.000 to 1.250 x VT in steps of 0.001 x VT
Minimum operating current:	0.000 to 30.000 x CT in steps of 0.001 x CT
Level accuracy:	±0.001 Hz
Timer accuracy:	± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate
Operate time:	typically 7.5 cycles at 0.1 Hz/s change typically 7 cycles at 0.3 Hz/s change typically 6.5 cycles at 0.5 Hz/s change

Frequency Rate Of Change (81R)

df/dt trend:	Increasing, Decreasing, Bi-directional
df/dt pickup level:	0.10 to 15.00 Hz/s in steps of 0.01
df/dt dropout level:	96% of Pickup Level
df/dt level accuracy:	80 mHz/s or 3.5%, whichever is greater
Min frequency:	20.00 to 80.00 Hz in steps of 0.01 Hz
Max frequency:	20.00 to 80.00 Hz in steps of 0.01 Hz
Min voltage threshold:	0.000 to 1.250 x VT in steps of 0.001 x VT
Min current threshold:	0.000 to 30.000 x CT in steps of 0.001 x CT
Pickup time delay:	0.000 to 6000.000 s in steps of 0.001 s
Timer accuracy:	± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate
95% settling time for df/dt:	< 24 cycles
Operate time:	typically 6.5 cycles at 2 x pickup typically 5.5 cycles at 3 x pickup typically 4.5 cycles at 5 x pickup

Directional Power (32)

Measured Power:	3-phase
Number of Stages:	2
Characteristic Angle:	0° to 359° in steps of 1°
Calibration Angle:	0.00° to 0.95° in steps of 0.05°
Power Pickup Range:	-1.200 to 1.200 in units of (Rated Power) in steps of 0.001 (Rated Power)
Pickup Level Accuracy:	± 1% or ± 0.001 (Rated Power), whichever is greater
Hysteresis:	2% or 0.001 (Rated Power), whichever is greater

Pickup Time Delay:	0.000 to 6000.000 s in steps of 0.001 s
Operate Time:	< 55 ms at 1.1 x pickup at 60 Hz < 65 ms at 1.1 x pickup at 50 Hz
Timer Accuracy:	± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate

Demand

Measured values:	Phase A/B/C present and maximum current, three-phase present and maximum real/reactive/apparent power
Measurement type:	Thermal Exponential, 90% response time (programmed): 5, 10, 15, 20, 30, or 60 min Block Interval / Rolling Demand, time interval (programmed): 5, 10, 15, 20, 30, or 60 min

Current pickup level:	10 to 10000 A in steps of 1 A
Real power pickup level:	0.1 to 300000.0 kW in steps of 0.1 kW
Reactive power pickup level:	0.1 to 300000.0 kVar in steps of 0.1 kVar
Apparent power pickup level:	0.1 to 300000.0 kVA in steps of 0.1 kVA
Apparent power pickup level:	96-98% of Pickup level
Level accuracy:	±2%

Power Factor (55)

Switch-In Level:	0.01 Lead to 1 to 0.01 Lag in steps of 0.01
Dropout Level:	0.01 Lead to 1 to 0.01 Lag in steps of 0.01
Delay:	0.000 to 6000.000 s in steps of 0.001 s
Minimum operating Voltage:	0.00 to 1.25 x VT in steps of 0.01 x VT
Level accuracy:	±0.02
Timer accuracy:	± 3% of delay setting or ± 1¼ cycle (whichever is greater) from pickup to operate

CONTROL**Synchrocheck (25)**

Maximum Frequency Difference:	0.01 to 5.00 Hz in steps of 0.01 Hz for frequency window of from ± 5 Hz
Maximum Angle Difference:	1° to 100° in steps of 1°
Hysteresis for Maximum Frequency Difference	10 to 600000 V in steps of 1 V
Difference:	0.01 to 0.10 Hz in steps of 0.01 Hz
Breaker Closing Time:	0.000 to 6000.00 s in steps of 0.001 s

Dead Source Function:	None, LB & DL, DB & LL, DB & DL, DB OR DL, DB XOR DL
Dead/Live Levels for Bus and Line:	0.00 to 1.5 x VT in steps of 0.01 x VT

Autoreclose (79)

Number of Breakers:	Single breaker application
Number of Poles:	3-pole tripping/autoreclose schemes
Reclose attempts:	Up to 4 before lockout
Blocking:	Each reclose shot can block IOC, raise TOC Pickup or change the setting group
Adjustability:	Current supervision can adjust the maximum number of shots attempted
Timer Accuracy:	± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate

AR Current Supervision And AR Zone Coordination

Operating Parameter:	Ia, Ib, Ic, In (Fundamental Phasor Magnitude)
Pickup Level:	0.050 to 30.000 x CT in steps of 0.001 x CT
Dropout Level:	97 to 98% of Pickup
Level Accuracy:	For 0.1 to 2.0 x CT: ± 0.5% of reading or ± 0.4% of rated, whichever is greater For > 2.0 x CT: ± 1.5% of reading
Timer Accuracy:	± 3% of delay setting or ± ¼ cycle, (whichever is greater) from pickup to operate

Trip Bus

Number of Elements	6
Number of Inputs	16
Pickup Time Delay	0.000 to 6000.000 s in steps of 0.001 s
Dropout Time Delay	0.000 to 6000.000 s in steps of 0.001 s
Operate Time	< 2 ms at 60 Hz
Timer Accuracy	± 3% of delay time or ± ¼ cycle (whichever is greater) from pickup to operate

MONITORING AND METERING**Phasors**

Parameters:	Phase A, B, C, Neutral and Ground
Magnitude Accuracy:	± 0.5% of reading or ± 2.0% of rated (whichever is greater) from 0.1 to 2.0 x CT ± 0.4% of reading > 2.0 x CT
Angle Accuracy:	2°

Voltages

Parameters:	Wye VTs: A-n, B-n, C-n, A-B, B-C, C-A, Average Phase, Neutral and Residual; Delta VTs: A-B, B-C, C-A, Neutral and Residual
Magnitude Accuracy:	± 5% of reading from 15 to 208 V
Angle Accuracy:	0.5° (10 V<V< 208 V) Positive, Negative and Zero Sequence Current
Magnitude Accuracy:	± 0.5% of reading or ± 0.2% of rated (whichever is greater) from 0.1 to 2.0 x CT ± 4.0% of reading > 2.0 x CT
Angle Accuracy:	0.5° (at 50/60 Hz, 15 V<V< 208 V)

Current And Voltage Harmonics

Parameters:	Magnitude of each harmonic and THD
Range:	2nd to 25th harmonic: per-phase displayed as % of f1 fundamental frequency
Accuracy:	0.2% + (1.8e-5*(f/60)^2.7 of reading)%, where f is the harmonic frequency

Transient Recorder

Default AC Channels:	5 currents + 4 voltages
Configurable Channels:	16 analog and 32 digital channels
Sampling rate:	128 /c, 64/c, 32/c, 16/c, 8/c
Trigger Source:	Any element pickup, dropout or operate, digital input or output change of state, FlexLogic operand
Trigger Position:	0 to 100%
Storage Capability:	non-volatile memory
Event Recorder	
Number of events	1024
Header:	relay name, order code, firmware revision

Content:	any element pickup, any element operate, digital input change of state, digital output change of state, self-test events
Data Storage:	non-volatile memory
Time-tag Accuracy:	to one microsecond

Digital Counters

Number of Counters	16
Counting	preset, compare
Programmability	reset, up/down, set to pre-set, freeze/reset, freeze/count

RMS Parameters**Currents**

Parameters:	Phase A, B, C, Neutral, Ground and Sensitive Ground
Accuracy:	± 0.2% of reading or ± 0.2% of rated (whichever is greater) from 0.1 to 2.0 x CT ± 0.25% of reading > 2.0 x CT

Voltages

Parameters:	Wye VTs: A-n, B-n, C-n, A-B, B-C, C-A, Average Phase, Neutral and Residual Delta VTs: A-B, B-C, C-A, Neutral and Residual
Accuracy:	± 0.5% of reading from 10 to 208 V

Real Power (Watts)

Range:	-214748364.7 kW to 214748364.7 kW
Parameters:	3-phase; per phase if VT is Wye
Accuracy:	± 1.0% of reading or 0.1 kW (whichever is greater) at -0.8 < PF ≤ -1.0 and 0.8 < PF < 1.0

Reactive Power (Vars)

Range:	-214748364.7 kVar to 214748364.7 kVar
Parameters:	3-phase; per phase if VT is Wye
Accuracy:	± 1.0% of reading or 0.1 kVar (whichever is greater) at -0.2 < PF ≤ 0.2

Apparent Power (VA)

Range:	0 kVA to 214748364.7 kVA
Parameters:	3-phase; per phase if VT is Wye
Accuracy:	± 1.0% of reading or 0.1 kVA (whichever is greater)

Power Factor

Parameters:	3-phase; per phase if VT is Wye
Range:	0.01 Lag to 1.00 to 0.01 Lead
Accuracy:	± 0.02

Watt-hours (positive and negative)

Range:	-2147483.647 MWh to 214748364.7 MWh
Parameters:	3-phase only
Update Rate:	50 ms
Accuracy:	± 2.0% of reading

Var-hours (positive and negative)

Range:	-2147483.647 MVarh to 214748364.7 MWh
Parameters:	3-phase only
Update Rate:	50 ms
Accuracy:	± 2.0% of reading

COMMUNICATIONS**Ethernet – Base Offering**

Modes:	10/100 Mbps
One Port	RJ45
Protocol	Modbus TCP

Ethernet – Card Option

Modes	100 MB
-------	--------

Two Ports	ST (with this option both enabled ports are on the communications card; the Ethernet port located on the base CPU is disabled)
Protocols	Modbus TCP, DNP3.0, IEC60870-5-104, IEC 61850, IEC 61850 GOOSE, IEEE 1588, SNTP, IEC 62439-3 clause 4 (PRP)
USB	
Standard specification	Compliant with USB 2.0

Protocol	Modbus TCP, TFTP
Serial	
RS485 port	Isolated
Baud rates	up to 115 kbps
Response time:	10 ms typical
Parity	None, Odd, Even
Protocol	Modbus RTU, DNP 3.0, IEC 60870-5-103
Maximum distance	1200 m (4000 feet)
Isolation	2 kV

WIFI	
Standard specification	IEEE802.11bgn
Range	30 ft (direct line of sight)

Testing and Certification

Test	Reference Standard	Test Level
Dielectric voltage withstand		2.3 kV
Impulse voltage withstand	EN60255-5	5KV
Damped Oscillatory	IEC61000-4-18/IEC60255-22-1	2.5 kV CM, 1 kV DM
Electrostatic Discharge	EN61000-4-2/IEC60255-22-2	Level 4
RF immunity	EN61000-4-3/IEC60255-22-3	Level 3
Fast Transient Disturbance	EN61000-4-4/IEC60255-22-4	Class A and B
Surge Immunity	EN61000-4-5/IEC60255-22-5	Level 3 & 4
Conducted RF Immunity	EN61000-4-6/IEC60255-22-6	Level 3
Power Frequency Immunity	EN61000-4-7/IEC60255-22-7	Class A & B
Voltage interruption and Ripple DC	IEC60255-11	PQT levels based on IEC61000-4-29, IEC61000-4-11 and IEC61000-4-17
Radiated & Conducted Emissions	CISPR11 / CISPR22 / IEC60255-25	Class A
Sinusoidal Vibration	IEC60255-21-1	Class 1
Shock & Bump	IEC60255-21-2	Class 1
Siesmic	IEC60255-21-3	Class 2
Power magnetic Immunity	IEC61000-4-8	Class 5
Pulse Magnetic Immunity	IEC61000-4-9	Class 4
Damped Magnetic Immunity	IEC61000-4-10	Class 4
Voltage Dip & interruption	IEC61000-4-11	0, 40, 70, 80% dips, 250/300 cycle interrupts
Conducted RF Immunity 0-150khz	IEC61000-4-16	Level 4
Ingress Protection	IEC60529	IP54 front
Environmental (Cold)	IEC60068-2-1	-40C 16 hrs
Environmental (Dry heat)	IEC60068-2-2	85C 16hrs
Relative Humidity Cyclic	IEC60068-2-30	6day variant 2
EFT	IEEE/ANSI C37.90.1	4KV, 2.5 khz
Damped Oscillatory	IEEE/ANSI C37.90.1	2.5KV, 1 Mhz
RF Immunity	IEEE/ANSIC37.90.2	20V/m, 80 Mhz to 1Ghz
ESD	IEEE/ANSIC37.90.3	8KV CD/ 15 kV AD
Safety	UL508	e57838 NKCR
	UL C22.2-14	e57838 NKCR7

Approvals		
	Applicable Council Directive	According to
CE compliance	Low voltage directive	EN60255-5 / EN60255-27
	EMC Directive	EN60255-26 / EN50263
		EN61000-6-2 / EN61000-6-4
North America	cULus	UL508
		UL1053
		C22.2.No 14
ISO	Manufactured under a registered quality program	ISO9001

Environmental	
Ambient temperatures:	
Storage/Shipping:	- 40C to 85C
Operating:	-40C to 60C
Humidity:	Operating up to 95% (non condensing) @ 55C (As per IEC60068-2-30 Variant 2, 6days)
Altitude:	2000m (max)
Pollution Degree:	II
Overvoltage Category:	III
Ingress Protection:	IP54 Front

Ordering

	850	E	**	NN	**	H	N	N	A	*	N	G	*	*	*	*	*	*	*	*	N	Description
Base Unit	850																				English Language; High Voltage PS, Graphical Control Panel	
Language		E																			English	
Phase Currents - Bank 1/2			P1																		1A three phase current inputs	
			P5																		5A three phase current inputs	
Ground Currents					G1																1A ground input	
					G5																5A ground input	
					S1																1A ground + 1A sensitive ground input	
					S5																5A ground + 5A sensitive ground input	
						H															110 - 250 V dc/110 - 230 Vac	
Power Supply																					110 - 250 V dc/110 - 230 Vac	
Slot F - HV I/O									A												2 Form A (Vmon), 3 Form C, 7 Digital Inputs (Low / High voltage, Int/Ext supply)	
Slot G - HV I/O										N											None	
									A												2 Form A (Vmon), 3 Form C, 7 Digital Inputs (Low / High voltage, Int/Ext supply)	
Faceplate												G									Color Graphical Display	
Current Protection													S								Basic = 50P, 50N, 50G, 51P, 51N, 51G	
												M									Standard = Basic + 50SG, 50_2, 51SG, 51_2, RGF	
												A									Advanced = Standard + 49,67P, 67N, 67G, 67SG, 67_2, Load Encroachment, Broken Conductor	
														S							Standard = 27P, 27X, 59P, 59N, 59X, 810, 81U	
Voltage Monitoring & Protection														P							Advanced = Standard + 25, 32, 32N, 55, 59_2, 81R	
															B						Basic	
															F						Standard = Basic + Flexlogic, CLP, 50BF, Trip Bus	
															C						Advanced = Standard + Autorelclose, Bus Transfer (Requires voltage option P)	
Monitoring																B					Basic	
Communications																C					Basic + Advanced Breaker Health	
																	S	E			Standard = Front USB, 1 x Rear RS485 : Modbus RTU, DNP3.0, IEC60870-5-103 + 1 x Ethernet (Modbus TCP)	
																	1	E			Advanced = Front USB, 1 x Rear RS485 + 2 x Ethernet Fiber, MODBUS RTU / TCP, DNP3.0, IEC 60870-5-103/104, 1588, SNTP	
																	1	P			Advanced + PRP	
																	2	E			Advanced + PRP + IEC 61850	
Fiber Optic Connector																			N		None	
																			S		ST, Multi-mode 850nm	
Wireless Communication																			N		None	
																			W		WiFi 802.11	
Security																				B	Basic	
																			A		Advanced - CyberSentry	

Note: Harsh Environment Coating is a standard feature on all 8 series units.

GEDigitalEnergy.com

IEC is a registered trademark of Commission Electrotechnique Internationale. IEEE is a registered trademark of the Institute of Electrical Electronics Engineers, Inc. Modbus is a registered trademark of Schneider Automation. NERC is a registered trademark of North American Electric Reliability Council. NIST is a registered trademark of the National Institute of Standards and Technology.

GE, the GE monogram, Multilin, FlexLogic, EnerVista and CyberSentry are trademarks of General Electric Company.

GE reserves the right to make changes to specifications of products described at any time without notice and without obligation to notify any person of such changes.

Copyright 2015, General Electric Company. All Rights Reserved.

GEA-12715E(E)
English
150202



imagination at work