

Model 147

Current Transformer Window Diameter 10.00"

Application

Relaying and metering.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Lower ratios available upon request.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

Short time thermal rating factor:
75 x rated primary current for 1 second.

For indoor service, in black plastic case.

Approximate weight 50 lbs.



REGULATORY AGENCY APPROVALS




Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Model 147

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60 Hz					Rating Factor at 30 °C Ambient	Secondary Winding Resistance (Ω @ 75 °C)
			B0.1	B0.2	B0.5	B0.9	B1.8		
147-202	2,000:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	0.414
147-252	2,500:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	0.447
147-302	3,000:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	0.495
147-402	4,000:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	0.707
147-502	5,000:5	C200	0.3	0.3	0.3	0.3	0.3	2.0	0.745
147-602	6,000:5	C400	0.3	0.3	0.3	0.3	0.3	1.5	0.975
147-802	8,000:5	C400	0.3	0.3	0.3	0.3	0.3	1.0	1.970
147-103	10,000:5	C400	0.3	0.3	0.3	0.3	0.3	1.0	2.190



Model 147

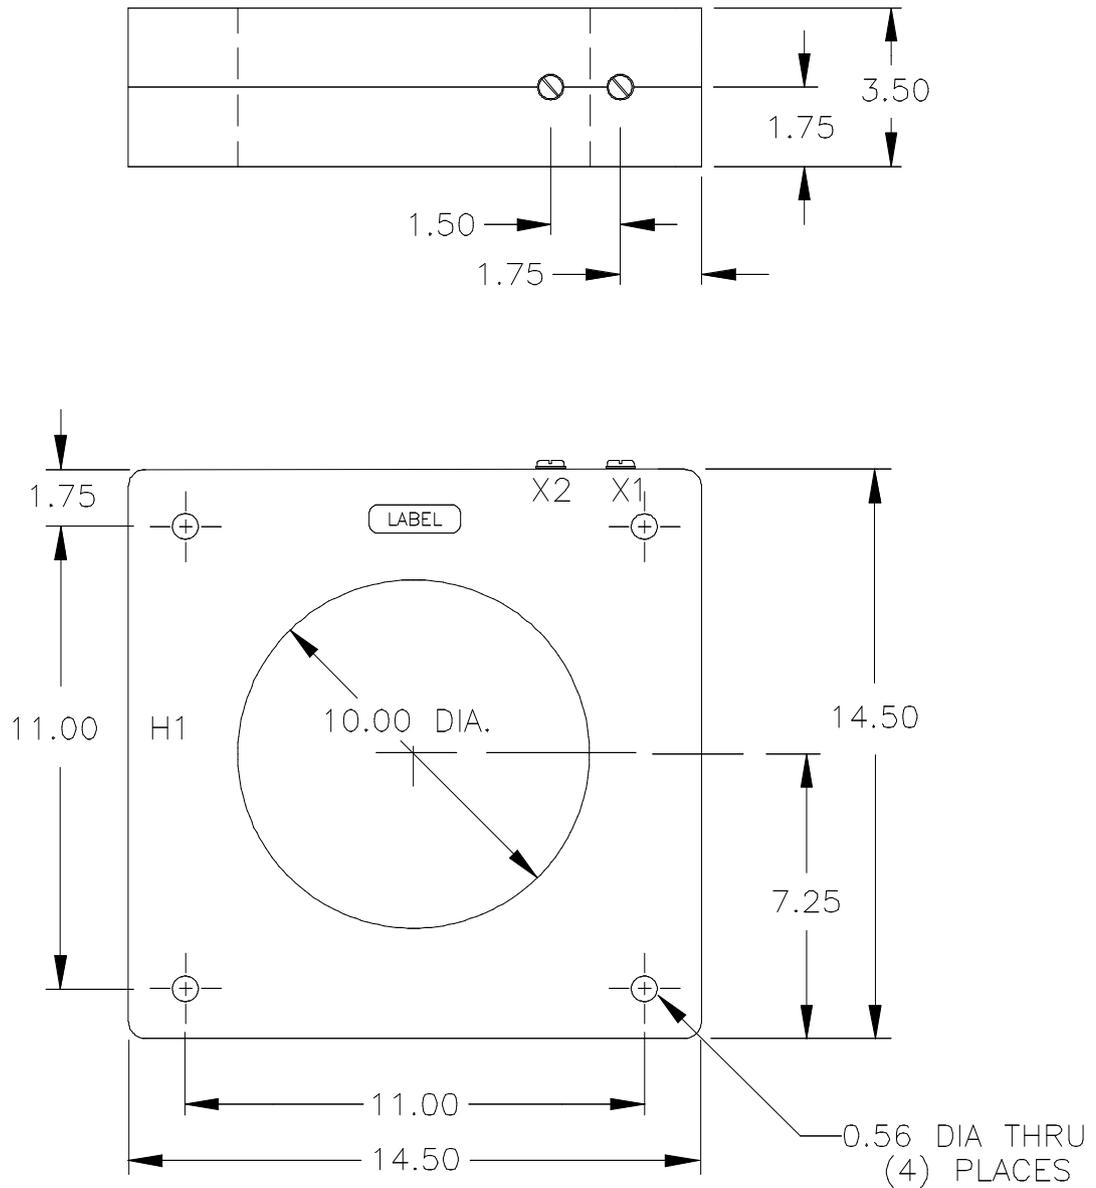

GEGridSolutions.com

ITI-Model-147-Spec-EN-2018-02-Grid-AIS-1263. © Copyright 2018. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

